

Safety & Medical Products

Industrial Safety & Hygiene
Emergency Response / Rescue
Medical & Fire-fighting
Homesafety



CE Certified Cone Type Masks


RI-1401



- EN149: 2001 FFP1 Respirator**
- CE certified
 - Low breathing resistant
 - Long duration
 - Highly efficient filtering media




RI-1401V



- EN149: 2001 FFP1 Respirator with Valve**
- CE certified
 - Low breathing resistant
 - Long duration
 - Highly efficient filtering media




RI-1401C



- EN149: 2001 FFP1 Respirator + Charcoal**
- CE certified
 - Low breathing resistant
 - Long duration
 - Highly efficient filtering media




RI-1402



- EN149: 2001 FFP2 Respirator**
- CE certified
 - Low breathing resistant
 - Long duration
 - Highly efficient filtering media



RI-1402V



- EN149: 2001 FFP2 Respirator with Valve**
- CE certified
 - Low breathing resistant
 - Long duration
 - Highly efficient filtering media



RI-1403V



- EN149: 2001 FFP3 Respirator with Valve**
- CE certified
 - Low breathing resistant
 - Long duration
 - Unique design
 - Highly efficient filtering media



CE Certified Foldable Type Masks

RI-1501 FFP1



- Well-Designed EN149: 2001 FFP1 Respirator**
- CE certified
 - Low breathing resistant
 - Long duration
 - Highly efficient filtering media



RI-1502 FFP2



- Well-Designed EN149: 2001 FFP2 Respirator**
- CE certified
 - Low breathing resistant
 - Long duration
 - Highly efficient filtering media



RI-1504CV FFP1/V



- Well-Designed EN149: 2001 FFP1 Respirator with Valve**
- CE certified
 - With Activated Carbon against organic vapor
 - Low breathing resistant
 - Long duration
 - Highly efficient filtering media



RI-1505V FFP2/V



- Well-Designed EN149: 2001 FFP2 Respirator with Valve**
- CE certified
 - Low breathing resistant
 - Long duration
 - Highly efficient filtering media



General / Surgical Masks

RI-1101



Cone Style Mask

PP 180-240g

- Cup-shaped mask is held away from nose and mouth for comfort and protection
- Shell type, nasal filter, elastic strap, fluid-resistant
- High level of bacterial and viral filtration

RI-1208



3-Ply Face Masks With Earloop

PP16/20/25g

This classical style meet B.F.E99%

RI-1208001




Thin Shield

- Latex and fiberglass free
- size : 17.5x9.2cm

NIOSH Approved

RI-1701




Effective N95 Respirator

- American standard, NIOSH certified
- Low breathing resistant
- Long duration
- Highly efficient filtering media



RI-1701V




Effective N95 Respirator with Valve

- American standard, NIOSH certified
- Low breathing resistant
- Long duration
- Highly efficient filtering media



RI-1701C




N95 Respirator + Charcoal

- American standard, NIOSH certified
- Low breathing resistant
- Long duration
- Highly efficient filtering media



RI-1701CV



N95 Respirator + Charcoal with Valve

- American standard, NIOSH certified
- Low breathing resistant
- Long duration
- Highly efficient filtering media



RI-1707M



N95 Disposable Particulate Respirator.

- These masks are intended to be used for protection against oil.
- An adjustable nosepiece and secure head-straps to provide proper fit.
- NIOSH Approvals TC-84A-4107
- FDA 510(K):K020474



RI-1703



N95 Respirator

- American standard, NIOSH certified
- Low breathing resistant
- Long duration
- Highly efficient filtering media



Fit Test Kit



RI-FT-1111 FIT TEST KIT

Fit testing is a method of ensuring an initial good fit for respiratory protection. It is a requirement to fit-test every user to ensure that their respiratory protection will offer the required protection.


Fit testing is also a very useful teaching aid to illustrate the importance of correct fitting and daily fit checking.

The kits comprise:

- Fit Test Instruction Booklet
- Hood & Collar assembly
- Nebulizers
- Sensitivity Solution

NEW!!

Assembly

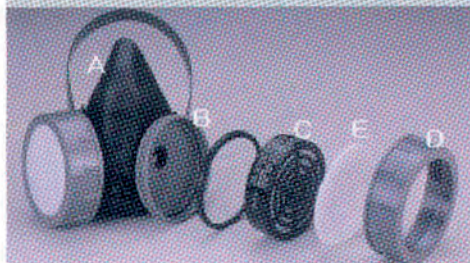

- A: Black comfortable rubber fitable facepiece
- B / D: Gray ABS cartridge holder, adjustable elastic head strap reinforcement PE headband
- C: Cartridge
- E: Anti-particulate pre-filter

RI-2010



One cartridge and dual diaphragm breather valve design.

(Two cartridge and one diaphragm breather valve design available.)

RI-2020



One cartridge and dual diaphragm breather valve design.

(Two cartridge and one diaphragm breather valve design available.)

Various Cartridges



- RI-2101: Anti dust
- RI-2102: Anti Organic vapors
- RI-2103: Anti paint spray
- SIZE: ϕ 78mm x 23mm (H)



- RI-2104: Anti inorganic vapors & acid gas
- RI-2105: Anti acid gas
- RI-2106: Anti ammonia vapors
- SIZE: ϕ 78mm x 23mm (H)



- RI-2107: Anti dust
- RI-2108: Anti Organic vapors
- RI-2109: Anti paint spray
- SIZE: ϕ 70mm x 34mm (H)



- RI-2110: Anti inorganic vapors & acid gas
- RI-2111: Anti acid gas
- RI-2112: Anti ammonia
- SIZE: ϕ 70mm x 34mm (H)



- RI-2201: Anti Organic vapors
- RI-2202: Anti paint spray
- RI-2203: Anti Organic & Inorganic Vapors & acid gas
- SIZE: ϕ 70mm x 47mm (H)



- RI-2301: Anti dust
- RI-2302: Anti organic vapors
- RI-2401: ABS pool



- RI-2610: Anti-organic & Acid gas

CE EN143

RI-ST-FDX



Half-face reusable gas mask
Durable and lightweight thermoplastic elastomer
Common applications in asbestos exposure, painting, Welding, chemical and Manufacturing.
Use with **ST-LDH 3/4/7** series cartridges

RI-ST-FDX



Half-face reusable gas mask
Durable and lightweight thermoplastic Elastomer, the valve is made of silicone
Common applications in asbestos exposure, Painting, welding, chemical and manufacturing.
Use with **ST-LDH 3/4/7** series cartridges

RI-ST-LDH3 Gas Mask Cartridge



Benzene, Gasoline, Chlorine, Acetone, Alcohols, Aniline, Carbon Disulfide, Carbon Tetrachloride, Chloroform, Bromofmethane, Chloromethane, Ether, Chloropicrin, Nitroalkanes

RI-ST-LDH4 Gas Mask Cartridge



Ammonia, Hydrogen sulfide

RI-ST-LDH7 Gas Mask Cartridge



Sulfur dioxide, Chlorine, Hydrogen sulfide, Nox, Phosgene, Phosphorus, Organic (chlorine)

Power Mask



Ideal for used in:

Particles Protection (Dust-Proof / Filtration) Ex. Construction, Mining, Cement, Textile and Wood working.

Features:

- * Light and easy-to-carry. Comfortable to wear seamless.
- * 100% Silicone rubber face piece covers user's face and no skin allergy.
- * 2-slice separation headband and back neck buckles-designed easy-to-wear.
- * Stable air-inflows. Long-time work.
- * Lower breathing resistant with high performance blower.
- * Positive pressure in the mask could prevent outside contaminant as blower operating and penetration is below 0.01%.
- * Two adjustable types. Battery Box with AA batteries * 4 pieces.
- * High filtration efficiency filters out small dusts and metal dust (0.3 mm micro)*

- ★ TUV CE emc testing and NIOSH Standard
- ★ Bronze medal by IENA 2003 (Internationale ausstellung "Ideen-Erfindungen-Neuheiten" Nurnberg 2003)
- ★ Patent right: Taiwan, Japan, China, Germany and UK.

Cartridges / Filters

RI-SFN-800 Particles Cartridge



For Use Against Dust and Particles only. Used in Particle protection (>0.3μ), such as wood-carving, holystone, etc

Contents : Spunbond + Meltblown + Paper

Weight : 30±3g/pc φ 80mm; 25mm



RI-SNA-201 Paper Filter

Use the SNA-201 non-weaving filter to filter dust, droplet or mist to extend the cartridge's life.

Contents : Non-weaving filter

Weight : 0.1g/pc φ80mm; 1mm



RI-SA-201
RI-SA-201 Clear Color
RI-SA-201 X 1
RI-SFN-800 Particle Cartridge X 3
RI-SNA-201 Paper filter X 10
RI-PP box X 1



RI-SA-202
RI-SA-202 Blue
RI-SA-202 X 1
RI-SFN-800 Particle Cartridge X 3
RI-SNA-201 Paper filter X 10
RI-PP box X 1



RI-3100/RI-3191



ANSI Z87.1 / CSA Z94.3 / CE EN 166 B certified

- Soft PVC frame & high impact clear polycarbonate lens.
- The round direct vents in the frame are anti-dust and anti-impact.

RI-3191 Anti-mist (Without Approval)



RI-3200/RI-3294



ANSI Z87.1 / CSA Z94.3 / CE EN 166 B certified

- Soft PVC frame & high impact clear polycarbonate lens.
- 4 indirect vents on the bottom and top.
- Anti chemical, anti-impact.

RI-3294 Anti-fog (Without Approval)



RI-3250



Cup type (lens: ϕ 50mm)

- ABS frame, high impact clear polycarbonate lens.
- 2 indirect vents on both side and adjustable bridge of the nose.

RI-3700



ANSI Z87.1 / CE EN166 certified

- A wide, soft PVC frame enhances wearer comfortable while work.
- Modern streamlined ultra wide-angle vision design lens enhance work efficiency and security.
- Wide, elastic adjustable head band to enhance reliability and easy to adjust.



RI-3300



CSA Z94.3 / ANSI Z87.1 / CE EN 166 certified

- Fitable facepiece & comfortable soft PVC frame & high impact clear polycarbonate lens.
- Direct vents on both sides and top, streamline shape and anti-dust, anti-impact.

RI-3395 Anti-fog (Without Approval)



RI-3350



CSA Z94.3 / ANSI Z87.1 / CE EN 166 B certified

- Fitable facepiece & comfortable soft PVC frame & high impact clear polycarbonate lens.
- 4 indirect vents on both side and top, anti chemical streamline shape, anti-impact.



RI-3400



ANSI Z87.1 / CE EN 166 B certified

- Fitable facepiece & comfortable soft PVC frame & high impact clear polycarbonate lens.
- 4 well-design indirect vents for anti- chemical splash, anti-impact and streamline shape.



RI-3800 specially for Children




ANSI Z87.1 / CE EN166 certified

- A wide, soft PVC frame enhances wearer comfortable while work.
- Modern streamlined ultra wide-angle vision design lens enhance work efficiency and security.
- Wide, elastic adjustable headband to enhance reliability and easy to adjust.



RI-3010

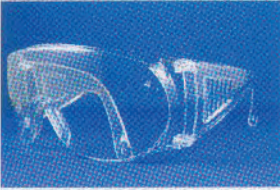

- ANSI Z87.1 / CE EN166 certified**
- 100% Polycarbonate
 - Suitable for over glasses
 - Color : ●●●●

RI-3060



- ANSI Z87.1 / CE EN166 certified**
- Nylon frame, polycarbonate lens.
 - Adjustable temples
- RI-3060R** Angle adjustable up and down
RI-3060A Adult size
RI-3060S Children or women size

RI-3090



- ANSI Z87.1 / CE EN166 certified**
- 100% Polycarbonate
 - Suitable for over glasses
 - Color : ●●●●

RI-3036



- ANSI Z87.1 / CE EN166 certified**
- Nylon frame, polycarbonate lens.
 - Temples are adjustable, soft rubber nose pad for best fit.

RI-3137



- ANSI Z87.1 / CE EN166 certified**
- Nylon frame, polycarbonate lens.

RI-3095



- ANSI Z87.1 / CE EN 166 certified**
- Nylon frame, polycarbonate lens.
 - Adjustable temples

RI-3025



- ANSI Z87.1 / CE EN166 certified**
- 100% Polycarbonate
 - Color : ●●●●

RI-3038



- ANSI Z87.1 certified**
- Nylon frame, polycarbonate lens.
 - Temples are adjustable, soft rubber nose pad for sung fit.

RI-3047



- ANSI Z87.1 / CE EN166 certified**
- Nylon frame, polycarbonate lens.

RI-3070



- ANSI Z87.1 certified**
- Acetate glass frame and temples, Polycarbonate lens.

RI-3075



- ANSI Z87.1 certified**
- Nylon frame and temples, Polycarbonate sideshield flat piece temples.

RI-3076



- Nylon frame and temples, Polycarbonate sideshield, metal mesh shield. un-adjustable temples
RI-3076R Temples are adjustable

Safety Spectacles

RI-3128



RI-3123



RI-3083T1



RI-3126



RI-3116



RI-3107B



RI-3107-1



RI-3111



RI-3027NT



RI-3028



RI-3094



RI-3037



RI-3048



RI-3089



RI-3035



RI-3078



RI-3063



RI-3070



RI-3054



RI-3069



RI-3041



RI-2724



RI-3034



RI-3079L



RI-3047



RI-3092



RI-3136FT



P7

RI-4050



Lift front (lens: ϕ 50mm)

ANSI Z87.1/CE EN 175 certified

- Green soft PVC frame, ABS lens holder.
- Four indirect vents in the frame and can be used in welding workplace.



RI-4060



Fixed front (lens: ϕ 50mm)

- Green soft PVC frame, ABS lens holder.
- Four indirect vents in the frame and can be used in welding workplace.

RI-4040



CSA Z94.3 certified

- Green soft PVC frame, high impact Green polycarbonate lens.

RI-4340



- Green soft PVC frame, high impact Green polycarbonate lens.

RI-4097



- Green soft PVC frame, high impact Green polycarbonate lens.
- 4 well-design indirect vents in the frame, and can be used in welding workplace

RI-4090



Lift front (lens : 2"X4-1/4")

ANSI Z87.1/ CE EN 175 certified

- Green soft PVC frame, ABS lens holder.
- Six indirect vents in the frame and be used in welding workplace.



RI-4080



Fixed front (lens: 2" X 4-1/4")

- Specification Same as RI-4090

RI-4070



Cup type (lens : ϕ 50mm)

ANSI Z87.1 CE EN 175 certified

- Black ABS cup, suitable for welding workplace.
- Two indirect vents on both sides, adjustable bridge over the nose.



RI-4035



Flip-front welding goggle (lens: ϕ 50mm)

ANSI Z87.1 CE EN 175 approved

- Comfortable flame offers all round protection
- Stream line shape & indirect ventilation




RI-4061 Brow Guard



ANSI Z87.1 / CE EN 166 EN1731 certified



• Impact-resistant PP brow protector could be used with suitable visors and offer the excellent protection. Special designed adjustable choke hinge supports many kinds of visor.

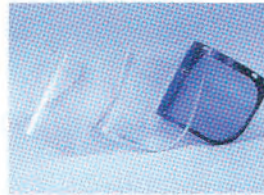

Item	Materials	Specification	Standard
VC81S		8"x13-1/2"x1.0mm thickness	CAS Z94.3, ANSI Z87.1 CE EN166
VC85S	Clear polycarbonate	8"x12" 1.0mm thickness	CAS Z94.3, ANSI Z87.1 CE EN166
VC85M		8"x15-1/2"x1.0mm thickness	ANSI Z87.1 CE EN166 CSA Z94.3
VCA85S	Clear Polycarbonate with Aluminum edge	8"x12" 1.0mm thickness	CE EN166 ANSI Z87.1
VCA85M		8"x15-1/2"x1.0mm thickness	CE EN166 ANSI Z87.1
VP85S-14	Plastic mesh	8"x12" (Mesh#14x14)	
VM85S-14	Steel mesh	8"x12" (Mesh#14x14)	
VM85S-24		8"x12" (Mesh#24x24)	CAS Z94.3, CE EN1731
VM85M-24		8"x15-1/2" (Mesh#24x24)	CE EN1731
VC83S	Clear Polycarbonate	27cmx15cmx0.5mm thickness	CE EN166
VC85MS	Smoke Polycarbonate	8"x15-1/2"x1.0mm thickness	CE EN166 / EN172

RI-4640 Brow Guard



ANSI Z87.1 / CE EN 166 EN1731 certified



• Fit for nylon RI-4720 headgear.
• Headgear & visor for faceshields can be changed or open mould, which according to the market demand.

RI-4802



CE EN 166 certified
• Fixed PE cap brow fits for VC85S visor

RI-4803



• Lift up PE cap brow fits for VC85S visor

RI-4890 Brow Guard



ANSI Z87.1 / CE EN 166 EN1731 certified



• Impact-resistant PP brow protector could be used with suitable visors and offer the excellent protection. Special designed adjustable choke hinge supports many kinds of visor
• Fit for nylon RI-4071A Nylon headgear.

RI-4804



• Lift up PP cap browguard fits for VC85S visor

RI-4824



• Lift up PP cap browguard fits for VP85S-14 visor

RI-4825



ANSI Z87.1 / CE EN 166 certified

RI-4805



ANSI Z87.1 / CE EN 166 certified

The combination products with ear muff, cap brows, visors.

Provide face and ear protection with light weight and comfortable design. Four combination on the left / right side for reference only. More options are available based on customer's demand.

RI-4801



ANSI Z87.1 / CE EN 166 certified

RI-4832



CE EN166
ABS headgear + PC lens + adjustable strip
Light weight face shield
Color: White, Neon Green



RI-4400 Lift window



ANSI Z87.1 / CE EN 175F certified

- PP excellent impact-resistance shell.
- RI-4071A nylon ratchet headgear.

RI-4570



Window size : 2" x4-1/4"
CE EN175 certified

- High impact resistance PP shell for larger protection area. Hide handle has well grip and good working position, and hanger for convenient use.

RI-4575



Window size : 90mm x 110mm

- High impact resistance PP shell for larger protection area. Hide handle has well grip and good working position, and hanger for convenient use.

RI-4520



Window size : 2"x4-1/4"

- Lightweight, streamline shape, high impact resistance PP shell, angle of evaluation well designed offer the best feel to the users.

RI-4525



Window size : 2" x4-1/4"

- Combine advantage of RI-4520 & RI-4400 provide not only wide range protection but also with attached handle for user's convenience.

RI-4580



Lift window · window size 2" x 4-1/4"
ANSI Z87.1 / CE EN175 certified

- Streamline shape, high impact resistance PP shell and RI-4071A

comfortable nylon ratchet headgear.
 • The combination of headgear and visors could be adjustable to meet customers' request.

RI-4510



Lift window size : 2" x4-1/4"
ANSI Z87.1 / CE EN175S certified

- Patent special design made of high impact resistance PP. Fit variety of suspension and for nylon RI-4720

headgear or other Economical ones.
 • The combination of headgear and suspension could be adjustable to meet customers' request.

RI-4530



Lift window size : 4-1/2"x5-1/4"
ANSI Z87.1 certified

- Patent special design made of high impact resistance PP. Fit variety of suspension and for nylon RI-4720

headgear or other Economical ones.
 • The combination of headgear and suspension could be adjustable to meet customers' request

RI-4560



Lift window size : 90mm x 110mm
CE EN175 F certified

- Patent special design made of high impact resistance PP. Fit variety of suspension and for nylon RI-4720

headgear or other Economical ones.
 • The combination of headgear and suspension could be adjustable to meet customers' request

RI-4565



Fixed window size : 90mm x 110mm
CE EN175 F certified

- Patent special design made of high impact resistance PP. Fit variety of suspension and for

nylon RI-4720 headgear or other Economical ones.
 • The combination of headgear and suspension could be adjustable to meet customers' request.

RI-4720



Headgear

- A convenient & long use adjustable structure headgear.
- A special design to adjust the distance

between headgear & window to forward or backward.
 • Easy to rectify to fit with various welding helmet.

RI-4071A/RI-4071B



RI-4071A :
 nylon ratchet headgear (standard accessories)
RI-4071B :
 nylon insertion slot adjustable headgear (optional accessories)

The combination of headgear and lens for option.

Auto-darkening welding helmet



RI-4721 Fixed front helmet with 2"x 4 1/4" shade #10-11 auto-darkening filter lens. Meets ANSI Z87.1

RI-4723 Fixed front helmet with 4 1/2"x 5 1/4" adjustable shade auto-darkening filter lens. Meets ANSI Z87.1


RI-4728 Fixed front helmet with 90 x 110mm c/w external auto-darkening filter lens Meets ANSI Z87.1 EN175 EN379 approval.

- All auto-darkening welding helmets have a polypropylene impact resistant shell and come with a strong, flexible nylon ratchet harness.
- Auto-darkening filter lenses have high speed switching times (1/25000 seconds), are solar powered and fully adjustable from shades 9-13
- Patented design: This unique design manufactured from high impact resistant PP. Can be fitted with a variety of harnesses



TEST

- Press "TEST" prior to each use.
- Cartridge offers complete UV/IR protection
- SENSITIVITY
- ARC/TIG
- LO/Hi
- Meet most indoor/outdoor welding requirements.
- Eliminates welder fatigue
- LOW BATTERY
- Please replace batteries immediately if the following appears.
 - a. Red light on cartridge is activated.
 - b. Lens in constant dark mode
- Shade adjustment by adjustable potentiometer on outside of helmet shell (9-13)
- Easily replaceable batteries

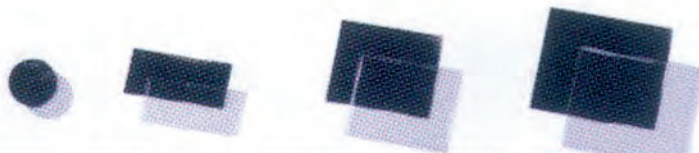

Item	Materials	Lens size	Standard	Fit in goggle & helmet
IR PL20G	Permanent UV/IR filters	2"x 4-1/4"	CE EN169 ANSI Z87.1	RI-4090,RI-4400,RI-4570,RI-4510,RI-4580,RI-4525
IR PL45G		4-1/2" x 5-11/4"	ANSI Z87.1	RI-4530,RI-4566
IR PL50G		∅ 50mm	CE EN169 ANSI Z87.1	RI-4050,RI-4060,RI-4070
IR PL90G		90mm x 110mm	CE EN169	RI-4575,RI-4560,RI-4565
PL21C	Clear high-Impact polycarbonate	2"x 4-1/4"	CE EN166 ANSI Z87.1	Same as PL20G IR
PL45C		4-1/2" x 5-11/4"	ANSI Z87.1	Same as PL45G IR
PL50C		∅ 50mm	CE EN166 ANSI Z87.1	Same as PL50G IR
PL90C		90mm x 110mm	CE EN166	Same as PL90G IR
GL20G	Green Glass	2"x 4-1/4"	ANSI Z87.1	Same as PL20G IR
GL45G		4-1/2" x 5-11/4"		Same as PL45G IR
GL50G		∅ 50mm		Same as PL50G IR
GL90G		90mm x 110mm		Same as PL90G IR
PL20G	Polycarbonate	2"x 4-1/4"	ANSI Z87.1	Same as PL20G IR
PL45G		4-1/2" x 5-11/4"		Same as PL45G IR
PL50G		∅ 50mm		Same as PL50G IR
PL90G		90mm x 110mm		Same as PL90G IR

RI-8100/RI-8101



RI-8100 ANSI Z89.1/ CE EN397 certified

- Cap shield made of high density PP, soft comfortable PE lining inside.
- Fit for CS-2 adjustable suspension slot or CS2R ratchet type headgear.

RI-8101 CE EN397/ ANSI Z89.1 certified

- Same as RI-8100 cap shield is made of high ABS, 4 point nylon webbing suspension inside



RI-8200




ANSI Z89.1/ CE EN397 certified

- Cap shield made of high-density impact PP, others features same as RI-8100 (ventilation hole on the top).



RI-8400



ANSI Z89.1 certified

- Cap shield made of high density impact PP, others features same as RI-8100.



RI-8500



CE EN397 / ANSI Z89.1 certified

- Around cap brow is suitable to outdoor long time presenting from sunshine and rain. High-density PP shell fit for CS55R-4 point web suspension on ratchet type headgear.



RI-8600



CE EN397/ ANSI Z89.1 certified

- Cap shield made of high density impact PP, New design shell offering optimum protection.
- High-density impact shell fit for CS66 -6 point web suspension on ratchet type headgear.



RI-8700



- Plastic inner cap: With 2 pieces impact-absorbed EVA pad for comfortable & protective purpose.
- Design with multiple vents.
- Same as general sports cap, variant material for option with customize logo/ figure by screen-printing/embroidery.
- Usage: Visiting factory, to see & enjoy sports competition, baseball judge, hunting...ect.

RI-8300



CE EN397 / Bump cap certified

Light weight working cap is great for is great for full time outdoor workers
HDPE shell fits in with CS-3 or CS-33 harness



CS-3 Includes three buttons
CS-33 Well-designed press buttons.
CS-1 Woven chin strap
CS-11 Elastic chin strap



CS2/CSS26/CS5/CS6 :

- Soft 4 or 6-point polyethylene adjustable slip harness suspension

CS22/CS226/CS55/CS66 :

- 4 or 6 point web suspension.
- Same harness but with ratchet adjustment for optional
- All safety helmet can be fitted with additional PPE, such as

1. clip-on ear defenders to protect the wearer.
2. WH770 Lightweight helmet mounted flip-up welding screen
3. PC Visors or Mesh visors



CS2



CS22



CS5



CS55



CS26



CS226



CS66



CS6

Lightweight helmet mounted flip-up welding screen



RI-4770 : Flip-front lens 2" x 4-1/4" meets ANSI Z87.1 CE EN175 approval
RI-4771 fixed front.

- Will fit most standard safety helmets with 30mm slot
- When fitted will protect the wearers face and ears due to the wrap around design.
- Can be used in a variety of work situations.
- This welding helmet cannot be used independently. Must be used in conjunction with safety helmet.
- #C17/C18 connector facilitates fit to the safety helmet.



safety helmet : RI-8100 / RI-8200 /
RI-8400 / RI-8600, Please refer P.
Ear mnff : RI-6167 / RI-6168/
RI-6187 w/connector, Please refer P.

Combination head protectors for head, eyes, face, hearing
• Includes safety helmet, earmuff, faceshield holder and visor.
• Suitable for various industries:
Metal-cutting operation, spray painting
carpentry, house remodified and decoration,
petroleum industry, chemical engineering,
agriculture, grinding processing
electric welding, iron and steel industry etc.

- Items below as per request can be combined :
- Safety helmet : RI-8100 / RI-8200 / RI-8400 / RI-8600,
Please refer P.
- A.Ear mnff : RI-6167 / RI-6168/RI-6187 w/connector,
Please refer to P
- B.Face shield holder : RI-4867, connectors for optional
VISOR : Please refer P.



C17/C07
Adaptor
• The different structure (design) of adaptor
C17/C07 & C18/C08 can snap on the safety
helmet from the catalogue or others, to
connect with ear muff, faceshield as a
combination helmet protector.

Practical and easy to use.

- Will protect the face at all times when worn correctly.
- Can be combined with many other PPE products dependant on application.



DP85Rc/wEP106c/wVM85S DP87Rc/wEP101c/wVM85S DP89Rc/wEP104c/wVM85M DP81Rc/wEP103c/wVC81S

Face & hearing protection combinations :
Earmuffs, Browguard & Visors

- Provide face and ear protection with lightweight and comfortable design.
Suitable for the horticulture, carpentry, grinding, metal-cutting operation & various
environment of agriculture, industrial & D.I.Y.
- Various combinations are available.



Ear Muffs

- POM headband, ABS cup and soft PVC leather.
- Adjustable slot on each side to adjust for a snug, comfortable fit 3 position adjustable headband - head, neck or chin

RI-6940



ANSI S3.19 /
CE EN 352-1 certified
NRR value : 14.71dB
SNR value : 27dB



RI-6030



ANSI S3.19 /
CE EN 352-1 certified
NRR value : 19.6dB
SNR value : 25dB



RI-6010



ANSI S3.19 /
CE EN 352-1 certified
NRR value : 14.39dB
SNR value : 19dB



RI-6060 / RI-6060H



ANSI S3.19 /
CE EN 352-1 certified
NRR value : 22dB
SNR value : 25dB
NRR value : 35dB(RI-6060H)



RI-6090



- Electronic earmuff
- Provide protection from noise
- Can connect radio and CD-player
- Let you listen to music while you work

RI-6100



- Classic ear muff
- 3-position adjustable
- Light weight and comfortable
- Advanced headband construction

- POM headband, HIPS cup & soft PVC leather.
- Foldable & pocket size for storage & carry easily with high function of NRR value. Suitable use in high volume or noise working.
- Smooth & comfort leather cover for option

Foldable Ear Muffs

RI-6070 / RI-6070H



ANSI S3.19.
--NRR value : 24.88dB
NRR value : 37dB (RI-6070H)
CE EN 352-1 approval--SNR
value : 30dB



RI-6080 / RI-6080H



ANSI S3.19 --NRR value : 19dB
NRR value : 32dB (RI-6080H)
CE EN 352-1 --SNR value : 26dB
• Attractive cup slim line design
& lightweight pocket size easy
for carrying



RI-6200



SNR 30dB Foldable Earmuff
3-position adjustable
Headband strap ensures a
better fit
Soft foam-filled cushion
Packing: one pair/ poly bag,
40pairs/ctn, 9.5kgs/ 3.1



RI-6138



ANSI S3.19 --NRR value : 31dB
CE EN 352-1 certified
--SNR value : 26dB
• Unique design offers ideal
protection for high noise
environment



Assembly with Safety Helmets

RI-6167



ANSI S3.19 NRR value : 22dB
CE EN 352-3 SNR value : 23dB
• HIPS cup & leather.
• The cup same as RI-6070
• Easy to snap on and off from
soft PVC safety helmet



RI-6168



ANSI S3.19 NRR value : 23dB
• HIPS cup & leather.
• The cup same as RI-6080
• Easy to snap on and off from
soft PVC safety helmet




RI-6187



ANSI S3.19 NRR
CE EN 352-3
• HIPS cup & leather.
• The entire revertex clamps
structure provides better
strength and sound-insulated
effect.
• Easy to snap on and off from
soft PVC safety helmet



RI-6001/RI-6002 Corded

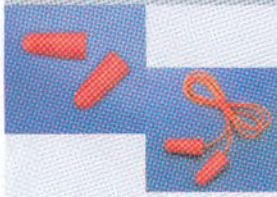

SNR 37dB NRR 32dB
 Highest SNR and NRR available in PU-foam earplug
 Disposable and one size fit all ear canal
 Available in various colors



RI-6005 Uncorded/Corded



SNR 26dB
 Mushroom silicone earplug with / without cord
 Reusable and one size fit all ear canal
 Contoured shape comfortably matches contours of the ear canal




RI-6017 Uncorded/Corded



SNR 33dB
 Silicone earplug with cord or without cord
 Reusable and one size fit all ear canal
 flange design gives the most comfortable




RI-6007 Triple leaf style



ANSI S3.19 NRR value : 25dB
CE EN352-2 SNR value : 25dB
 • Combined with soft rubber ear plug, PP tubular insert device, nylon neck string, and portable poly box.
 • Various color and logo are available & welcome



RI-6008 Triple mushroom style



ANSI S3.19 NRR value : 25dB
CE EN352-2 SNR value : 23dB
 • Specification same as triple leaf style.
 • Various color and logo are available & welcome.



RI-6006 Banded earplug



ANSI S3.19 NRR value : 26dB
CE EN352-2 SNR value : 19dB
 Handy and flexible PP neck string, comfortable sucker style silicone rubber plug.



RI-6006-1 Banded earplug



ANSI S3.19 NRR value : 26dB
CE EN352-2
 Streamline artistic ear band design , Replacable by various material plug



RI-6009 Banded earplug



CE EN 352-2 certified SNR value : 21dB
 • Plugs exchangeable, special-shaped plugs provide a comfortable fit
 • Plug and banded are available in various colors
 • Banded prevents ear pads from touching dirty or contaminated surfaces • Can be hanged around the neck



RI-6009-1 Banded earplug



CE EN 352-2 certified SNR value : 20dB
 • Plugs exchangeable
 • Plug and banded are available in various colors
 • Banded prevents ear pads from touching dirty or contaminated surfaces
 • Can be hanged around the neck



RI-6009-3 Banded earplug



Foldable banded earplug.
 Low weight and easy carry
 Plugs exchangeable, special-shaped plugs provide a comfortable fit



RI-5010



100% Rubber coated work gloves, rough finish, fully coated, cotton knitted lining, knit wrist, gauntlet cuff
CE category 2,
EN388&EN420 approvals



RI-5020



Safety cuff, elastic expander at back, woven cotton lining
CE category 2, EN388 & EN420 approvals.
Size : 9, 10, 11



RI-5030



Fully coated, knit wrist, comfortable knit jersey lining, crinkle finish provides safer handling and good grip.
Resistance to cuts.
Job fitted for handling slippery or sharp-edged materials such like glass, sheet metal, concrete block, tile and lumber.
• Size : ,9" ,10" ,11"

RI-EL-211K

NATURAL RUBBER COATED WORK GLOVES



Fully coated, gauntlet, interlock cotton knit lining, rough particle finish provides superior grip in dry or wet.
Excellent flexibility, snug fit and dexterity, soft and comfort.
Job fitted for light fabrication, transportation, agriculture, lumber and marine products process.
• Length: 25.50cm
• Size : S , M , L , LL (7" , 8" ,9" ,10")
• Smooth surface style also available: RI-EL-200K

RI-EL-222K

NATURAL RUBBER COATED WORK GLOVES



Fully coated, knit wrist, interlock cotton knit lining.
Soft and light weight contribute to excellent finger dexterity and snug fit, flexibly and comfortably.
Job fitted for packaging, transportation, agriculture and gardening.
• Size : S , M , L , LL (7" , 8" ,9" ,10")
• Open back style also available: RI-EL-223K

RI-EL-200KN

NITRILE COATED WORK GLOVES



Fully coated, gauntlet, interlock cotton knit lining.
• Length: 25.50cm
• Size : S , M , L , LL (7" , 8" ,9" ,10")

RI-EL-211KN

NITRILE COATED WORK GLOVES



Fully coated, gauntlet, interlock cotton knit lining, rough particle finish provides excellent grip in dry or wet.
• Length: 25.50cm
• Size : S , M , L , LL (7" , 8" ,9" ,10")

RI-EL-223KN

NITRILE COATED WORK GLOVES



Open back, knit wrist, interlock cotton knit lining.
• Size : S , M , L , LL (7" , 8" ,9" ,10")

RI-EL-355KN

NITRILE COATED WORK GLOVES



Fully coated, gauntlet, comfortable knit jersey lining.
• Length: 24-33cm
• Size : 10" , 11"
• Inner drill lining also available: RI-EL-355DN

RI-5040/RI-5050 Rubber Glove



RI-5040

- embossed palm finish, rolled cuff
- household

RI-5050

- rough palm finish, rolled cuff
- CE category 2, EN388 & EN 420 approvals



RI-5060/RI-5060R Rubber Glove



RI-5060

- smooth palm finish, rolled cuff
- CE category 2, EN388 & EN420 approvals.

RI-5060R

- rough palm finish, rolled cuff
- CE category 2, EN388 & EN420 approvals.



RI-NS-500W PU Glove



Solvent oil resistant

- Color: White
- Cotton lining
- Size: LL-34cm, L-33cm, M-32cm

RI-CSM-56 CSM Gloves



Chemicals/Acids/Alkaine resistance

- 35% Hydrochloride Acid, 60% Nitric Acid
- 96% Sulfuric Acid
- 50% Sodium hydroxide, 30% Hydrogen peroxide

RI-PNF-015 Nitrile Gloves



- Length :330+-10mm
- Resistant to Solvent, Oils & Fats
- Superior reliability
- Electrostatic Lining Technology - soft cotton lining
- Chemically toughened Nitrile
- Outstanding chemical resistance
- Food Safe - CE & FDA, US
- CE Certified



RI-BIC-200 Neoprene Over Rubber Glove



- Length :320+-10mm
- Advance dipping Technology
- Chloroprene over natural Rubber glove
- Improved Puncture Resistance at palm
- Resistant to Oils & Fats Excellent grip in wet environment
- Electrostatic Lining Technology - soft silky cotton lining
- Food Safe - CE Chemically toughened
- Chemical resistant chart available



RI-PV-026 PVC Gloves



- PVC Gloves
- Lenght: 25cm
- Chemical Resistant

RI-NB-322S Neoprene gloves



- Neoprene dipped gloves
- Cotton jersey liner
- Sandy finish
- Gauntlet cuff

RI-NT-100 Nitrile Gloves



- Powder free**
- Lenght: 23cm
- Thckness: 0.18~0.2 mm
- For: Clean room, Lab, DIY

RI-LA-100 Latex Gloves



- Powdered /Powder free**
- For Exam / Surgical**
- Lenght: 23cm
- Thckness: 0.17~0.18 mm
- For: Clean room, Lab, DIY
- AQL:1.5

Coated Gloves

RI-GW-513 Nylon Gloves



Nylon + PU Coating
Length: 25cm
Color: White

RI-5520 KEVLAR Gloves



Anti-abrasive, Cut-resistant
and Heat-resistant
Temp resistance :
Flash fire 550°C
Length : 36cm
Colors : Yellow

RI-5510 KEVLAR Gloves



Anti-abrasive, Cut-resistant
Temp resistance : Flash fire 550°C
Length : 25cm
Colors : Yellow

RI-5530 KEVLAR Gloves with rubber dots



Anti-abrasive, Cut-resistant
Temp resistance :
Flash fire 550°C
Length : 25cm
Colors : Yellow

RI-TE-106 Welding Gloves



Welder
Full Grain Leather
Split Leather Cuff
Length: 28 & 35cm

RI-TE-101 Driver Gloves




Full Beige or Yellow
Grain Leather
Cotton Back
Rubberized Cuff
Length: 26 cm

RI-TE-101-1 Driver Gloves




Driving
White Grain Leather
Shirred Elastic Back
Size: 7, 8, 9, 10 & 11

RI-SO-503 Welding Gloves



Cowhide Leather
Welding
Length:
34cm or 38cm

RI-CT-001



Lorton Glove

RI-CT-003



Lorton glove
coated with
latex

RI-CT-004



PVC dotted
glove

RI-TE-152R Leather Working gloves



- CE EN 388 Certified
- Elastic wrist
- Size : 8, 9, 10, 11



RI-PL-501/501A Leather Working gloves



- 100% pig skin/cowhide
- Length: 23cm

RI-TE-109R



Welder Full Split Leather
Dimension: Length 28 & 35 cms.

RI-TE-107



Welder Combined Leather
Dimension: Length 28 & 35 cms.

RI-TE-176




Fireman Glove, Full Split Leather (Natural Coloured), Full inside lined.
Dimension: Length 35 cms.

RI-TE-153R



Full Grain Leather, in white or yellow, Shirred Elastic Back
Dimension: Length 7, 8, 9, 10 & 11 cms.

RI-TE-155



Driving Full Split, Shirred Elastic Back
Dimension: Size 7, 8, 9, 10 & 11 cms.

RI-TE-154



Driving Full Grain Leather, Back Split, Shirred Elastic Back
Dimension: Size 7, 8, 9, 10 & 11 cms.

RI-TE-118 GRPTI



Full Split Leather, Reinforced Palm, Thumb and Index Finger, Cotton Back, Palm & Thumb Lined, Rubberized Cuff.

RI-TE-102



Full Cowgrain Leather, Strong Cotton Back, Palm Lined, Canvas Cuff
Dimension: Length 26 cms.

RI-TE-202



Welding Trousers, Split or Grain Leather
Dimensions: Size: 48, 50, 52, 54, 56, 58, 60 & 62.

RI-TE-205



Apron. Split or Grain Leather
Dimensions: 80 x 100 cms & 60 x 90 cms.
Other customized sizes also possible.

RI-TE-207



Leg Guard. Split or Grain Leather
Dimensions: 30 & 35 cms.

RI-TE-206



Arm Guard Grain or Split Leather
Length: 65 cms.

Welding Jacket, Split or Grain Leather
Dimension: Size 48, 50, 52, 54, 56, 58, 60 & 62 cms.



RI-SD-502

Leather Canvas gloves Length: 30cm



RI-1210 Apron

- MATERIAL: NEOPRENE
- Construction fiber: Nylon 200Denier woven
- Count: 41 X 41
- Thickness: 0.33mm
- Weight: 14 oz/yd2
- Tear Strength: ASTM D751 17/14(Lbs-F/in)
- Chemical Resistance
- Meet ASTM D6413-99 Flame Resistance



RI-1220 Apron with sleeves

- MATERIAL: NEOPRENE
- Construction fiber: Nylon 200Denier woven
- Count: 41 X 41
- Thickness: 0.33mm
- Weight: 14 oz/yd2
- Tear Strength: ASTM D751 17/14(Lbs-F/in)
- Chemical Resistance
- Meet ASTM D6413-99 Flame Resistance



RI-1230 Coverall with Hood and Elastic Wrist and Ankle

- MATERIAL: NEOPRENE
- Construction fiber: Nylon 200Denier woven
- Count: 41 X 41
- Thickness: 0.33mm
- Weight: 14 oz/yd2
- Tear Strength: ASTM D751 17/14(Lbs-F/in)
- Chemical Resistance
- Meet ASTM D6413-99 Flame Resistance



RI-NP-9088 Coverall

- MATERIAL: NEOPRENE
- Durable Level B coverall
- With attached boot
- With attached glove by an adapter



PVC Rain Coat

- Constructed of heavy-duty PVC on nylon/polyester
- Reinforced crotch area to prevent splitting
- Heavy duty elastic adjustable suspender
- Adjustable waist snaps for the perfect fit
- Ankle and cuff take-up snaps for a snug/tapered fit
- Jacket with storm flap front
- Two front snap pockets on jackets



Common textile Workwears

- Material :
100% cotton/ 65% polyester + 35% cotton
Fabric weight:
160 gram ~ 280 gram
Regular Design:
1.Overalls-Half sleeves / Full Sleeves
2.Jackets
3.Apron
4.Pants
For common working



RI-Z1H428 Zytron® 100 coverall

ZYTRON®

THE LAST WORD ON PROTECTION,
FROM THE FIRST NAME IN INNOVATION.



The concept of an apparel matrix is pure Kappler innovation a simple system to identify protection levels. Today, the legacy continues with Zytron® unsurpassed protection, an easy-to-use numbering system, and distinctly colored garments for clear identification. Zytron® One look and you'll see we've got your number.



Coverall

Zipper Front, Attached Hood, Elastic Wrists, Ankles and Face Opening

RI-PV7-438 ProVent® 7000 coverall



ProVent® 7000 is a lightweight composite utilizing microporous film technology that provides excellent protection against hazardous particles and light liquid splash. A notable feature is its soft, draping characteristics. ProVent® 7000 also passes ASTM 1670 for blood penetration resistance.



Coverall

Zipper Front with Storm Flap, Attached Hood, Elastic Wrists, Ankles and Face Opening.

RI-FTHS307



HEAVY DUTY RAIN SUIT

FABRIC: PVC/POLYESTER, PVC/POLYESTER/PVC THICKNESS: 0.28-0.40MM JACKET WITH ATTACHED HOOD OR DETACHABLE HOOD WITH DRAW CORD, STORM FLY WITH ZIPPER OR BUTTON TWO FLAPPED POCKET, VENTILATED CAPE BACK UNDER ARM VENTS. PANT WITH ELASTIC WAIST. TAKE UP SNAP ON WRISTS & ANKLES.
SIZE: S-M-L-XL-2XL-3XL

RI-FTHC308



HEAVY DUTY RAIN COAT

FABRIC: PVC/POLYESTER, PVC/POLYESTER/PVC THICKNESS: 0.28-0.40MM

RI-FTHS306



HEAVY DUTY BIB PANT RAIN SUIT

FABRIC: PVC/POLYESTER, PVC/POLYESTER/PVC THICKNESS: 0.28-0.40MM JACKET WITH ATTACHED HOOD OR DETACHABLE HOOD WITH DRAW CORD, STORM FLY WITH ZIPPER OR BUTTON TWO FLAPPED POCKET, VENTILATED CAPE BACK, UNDER ARM VENTS. BIB PANT WITH SNAP ON FLY FRONT AND ELASTIC SUSPENDERS. TAKE UP SNAP ON WRISTS & ANKLES
SIZE: S-M-L-XL-2XL-3XL

RI-FTCS213



CAMOUFLAGE RAIN SUIT

FABRIC: 100% PVC, NYLON/PVC, NYLON/PU ATTACHED HOOD WITH DRAW CORD STORM FLY WITH BUTTON OR ZIPPER PANT WITH ELASTIC WAIST

RI-FTHJ309



HEAVY DUTY RAIN JACKET

MATERIAL: PVC/POLYESTER, PVC/POLYESTER/PVC THICKNESS: 0.28-0.40MM

RI-FTPA212



Plastic Apron

FABRIC: 100% PVC, PVC/POLYESTER, PVC/POLYESTER/PVC Size: 56X90cm 71X110cm

*ZYTRON® & ProVent® are the material trade marks of Kappler Inc. USA.

RI-S900(EN345-1:SB-S1P)



Barton Printed Black Cow Leather

RI-AM-K801(EN345-1:SB-S1P)



Barton Printed Black Cow Leather
Size : NO/38-47

RI-AL-K801(EN345-1:SB-S1P)



Black Cow Leather

RI-K703(EN20345 SB-S3)



Black full grain upper leather

RI-QL-089 Safety Boots



Safety boots (chemical resistance)
Height : 16"(41cm)

RI-QL-086 Safety Boots



Natural rubber shoe
(acid and alkali liquid proof)

RI-QL-061 Safety Boots



Firefighter insulated shoe
(anti-slide)
Features : Water-proof, anti-slip sole
Height : >27cm

RI-LT-107 PVC Safety Boots



For common working place
Chemicals splash resistance
Height : 40cm
Size : NO/40-44
CE certified

RI-LT-200 PVC Safety Boots



Thermal protection PVC boot
Features : For working under cold weather / low temperature

RI-LT-202 PVC Safety Boots



Insulated PVC safety boot (6KV)
Feature : Anti-slip, Anti-chemicals, Anti-puncture

RI-7050 Rubber boots



For Chemical protection
With steel toe

RI-7040 Over Shoe



Natural rubber
Length : 4", 10", 17"

NOMEX® GARMENT for Fire & ARC Protection

Garments of Nomex® consistently provides outstanding thermal performance because Nomex® IIIA:

- *Is inherently flame resistant
- *FR apparel made with Nomex® helps protect against heat and flame up to 400~500°C.
- *Provides permanent flame resistance that wash out or wear away
- *Minimizes break-open and maintain stable, insert barrier between the fire/arc and skin, protecting the
- *wearer from direct exposure
- *Forms a tough, protective char when exposed to flame, and stays supple until it cools.



RI-WDP-NX-1080
Jacket



RI-WDP-NX-2070
Outer coat



RI-WDP-NX-1030
Apron with sleeve
(open back)
RI-WDP-NX-1040
Apron with sleeve
(open back), Heavy duty



RI-WDP-NX-1070
Long sleeve shirt



RI-WDP-NX-1090
Pant



RI-WDP-NX-2010
Flame resistant hood



RI-WDP-NX-2030(6oz/Y²)
Fire-resistant foot cover(single layer)
RI-WDP-NX-2030(6oz/Y²)
NOMEX(6oz/Y)
Fire-resistant foot cover



RI-WDP-NX-1000
Apron
RI-DP-NX-1010
Apron(Heavy duty)

* NOMEX® is the traded mark of DuPont Company. USA.

Flame / Heat Resistant Clothings

RI-9100/RI-9101/RI-9200/RI-9300/RI-9400/RI-9500/RI-9600/RI-9700/RI-9800/RI-9900



RI-9100
Aluminized Gloves
Length : 14"



RI-9101
Aluminized Gloves
Length : 16"



RI-9400
Aluminized boot
with steel toe



RI-9300
Aluminized Galter,
one size



RI-9200
Aluminized
sleeves
Length: 22"



RI-9500
Aluminized hood with
wide field of vision



RI-9800
Aluminized Coat, button front
Chest width: 48"
Length: 29"



RI-9700
Aluminized Apron
with sleeves
Chest width: 27"
Length: 49"



RI-9900
Aluminized Pants
Waist circle: 34"
Length: 39"



RI-9600
Aluminized Apron
Chest width: 27"
Length: 38"

Electro Holder

Arc welding clip size: 200A - 300A - 400A - 500A - 600A



Earth clamp

Earth clamp size: 200A - 300A - 400A - 500A - 600A




Female Male
30~50mm²



Female Male
50~70mm²




Female Male
70~95mm²

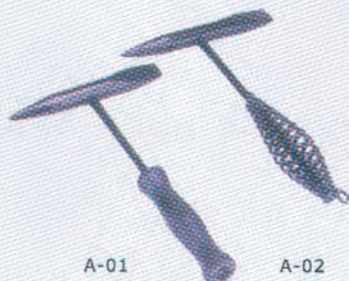

A-01

A-02

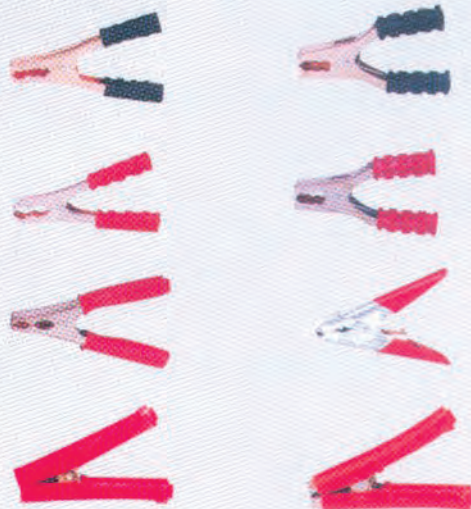

HS-RB-1 Reflective belt



With reflective tape both front and back retains its color under toughest weather.
Good for construction worker, street workers, traffic control, public utilities, safety patrols

HS-TB-003 LED Multi Function Baton



It is shock resistant and can be operated in flash mode, good for construction worker, street workers, traffic control, public utilities, safety patrols

HS-TA-02 Reflective vest



With reflective tape both front and back retains its color under toughest weather. Good for construction worker, street workers, traffic control, public utilities, safety patrols

HS-TC-01 Traffic Cone



- With PVC or PE material available
- Height : 70cm / 90cm / other height available
- Base : 37cm / 37cm

Applications : construction areas, street, traffic control, public utilities, safety patrols

RI-TC-03 Traffic Cone



Foldable
Applications : construction areas, street, traffic control, public utilities, safety patrols

HS-TC-05 Traffic Cone



Four angle cone
Applications : construction areas, street, traffic control, public utilities, safety patrols

RI-RP-001 RUBBER PAD



To add weight on Traffic cone for wind resistant
(For HS-TC-01)

HS-LD-101 Corner Protector



Flexible plastic for impact and breakage resistance.
Length : 30, 60, 90, 120, 150
Color : Yellow base with yellow /black (white/red) zebra tape/Black base with yellow /black (white/red) zebra tape

RI-DL-185 Magnetic Revolving Light



Color available in red, yellow, blue & green
In the foggy or rainy days, the big parabolic reflector produces maximum beam candlepower

HS-RB100/HS-RB120/HS-RB180 ROTATING BEACONS



High performance revolving warning light
Are waterproof available in red, blue and yellow
ABS base is corrosion-resistance
Mini-motor can drive over 1,000hrs
Voltage : 12VDC/24VDC/110VAC/220VAC/240VAC
Usage : working site, parking exits, machine operating, signboard, etc

RI-MR-001 Reflecting Mirror



Size : 80cm
Mirror Face Material : Stainless Steel (Unbreakable)
Mirror Plate Material : Zinc Plated
1. Applications - Outdoor (Road - Car parks - Production areas).
2. Stainless Steel Mirror surface provides clear image and easy maintenance and easy installation.
3. Adjustable angle and swivel assembly mounting brackets .

RI-RB-001 Speed Downer




For slowing down the speed of cars
Rubber Bump Size :
1. 500 x 500 x 25mm
2. 500 x 500 x 35mm
3. 450 x 500 x 50mm
PVC Bump Size :
1. 500 x 500 x 25mm
2. 500 x 500 x 35mm
3. 500 x 500 x 50mm

RI-GP-04 Guide Post



90x810 mm
Yellow+Black

RI-RSR-01 Road Stud



Reflection Road Stud (Mark)
104 x 104 x 30(H)mm
104 x 104 x 18(H)mm
color : Yellow

RI-PB-03 Packing Bumper(Block)



PE Parking Bumper-B type
140x570x120
Yellow

Reflective Jackets



RI-RJ01
Size: M-3XL
Fabric: PU milky coating oxford(front), black fleece with rib collar(reverse)
Tape: 2" wide silver sew on tape
Closure system: black plastic zipper on the front body and stoppers on two sides of the body



RI-WBJ-02
Fabric: orange(lime) PU milky coating oxford
Tape: 2" wide silver sew on tape
Closure system: black plastic zipper and snap
Lining: black fleece



RI-WBJ-01
Size: M-3XL
Fabric: orange(lime) PU milky coating oxford
Tape: 2"wide silver sew on tape
Closure system: black plastic zipper and snap
Lining: dye-to-match



RI-RJ02
Size: M-3XL
Fabric: PU milky coating oxford
Tape: 2" wide silver sew on tape
Closure system: black plastic zipper and snap
Lining: black quilted



Reflective Clothing




RI-D01-T01
 Conforms to EN471 class 2
 100%Polyester knitting waistcoat
 Colour:Fluorescent Orange,Fluorescent Yellow
 SIZE:S-3XL



RI-D01-J18
 Conforms to EN471 class 3 HV suits
 150D Polyester/PU coating material
 Colour:Fluorescent Orange,Fluorescent Yellow
 SIZE:S-3XL



RI-D01-J14
 Conforms to EN471 class 3
 In waterproof breathable polyester/PU coating material, inside vest with detachable sleeves & knitted cuff.
 Outshell:250D polyester Oxford/PU breathable coated
 Colour:Fluorescent Orange,Fluorescent Yellow



RI-01W-01-6
 100% polyester mesh high Visibility vest, with high reflective PVC tape
 Colour:Fluorescent Orange,Fluorescent Yellow
 SIZE:S-3XL



RI-D01-J09
 Conforms to EN471 class 3
 100%Polyester knitting jacket
 Colour:Fluorescent Orange,Fluorescent Yellow
 SIZE:S-3XL




RI-D01-U02
 Rainsuit
 Conforms to EN471 class 3 with high reflective PVC tape... Polyester/PU coating material
 Colour:Fluorescent Orange,Fluorescent Yellow
 SIZE:S-3XL




INDUSTRIAL SAFETY BELT /HARNESS

Product Content : PASSED CE APPROVAL (WITHOUT ROPES)
 PERSONAL PROTECTIVE EQUIPMENT AGAINST FALLING FROM HEIGHT
 Production Packing : 1PC/POLYBAG, 8PCS/CARTON/1.7CUFT.
 WE CAN MANUFACTURE ACCORDING TO YOUR REQUIREMENT

RI-SAV99-1

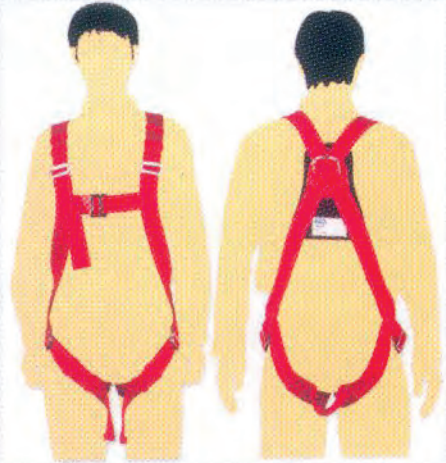

RI-SAV99-2

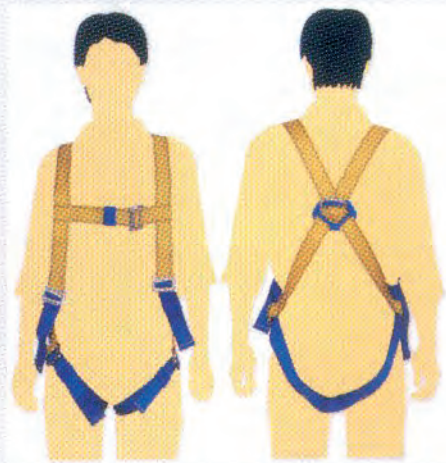

RI-SAV99-3




RI-SAV9-4

Produc Content : USED FOR HARNESS



NET

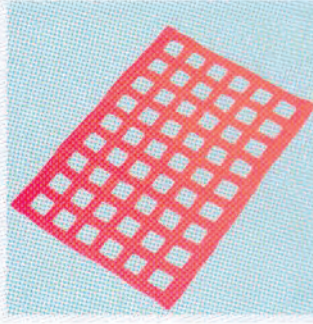

RI-SAV-99



RI-PTR-512



RI-NTR-164H



RI-NTR-164HB



RI-NTR-164L



RI-PTR-712



RI-NTR-254H



RI-NTR-304H



RI-NTR-354H



Emergency Response / Containment System & Kits

Decon Shelters

DCR-AC-520-4 Decon-Master II



Inflatable Decon shelter-Multi people
Size: 3.4M(L) X 2.8M(W) X 2.5M(H)
Material of frame : Neoprene, EPDM, Butyl, Hypalon
Material of Canopy: 420D Nylon with PU coating
Air beam: 20cm(dia.)
*Shower system (optional)

DCR-AC-520-1 Decon-Mater I



Blower-Air Pump

Inflatable Decon shelter -Single person
Size: 2M X 2M X 2.5M (H)
Material of frame : Neoprene, EPDM, Butyl, Hypalon
Material of Canopy: PE
*Shower system (optional)

DCR-AC-620-1 Decon-Mater III



Inflatable Decon shelter -Single person
With 12 nozzles,
(optional items: Decon Mat, Tie rope, Water collecting tank, repair kits, Compressor cylinder, Sump pump, PVC pallet)
Size : 2M(L) X 2M (W) X 2.5M (H)

Fire Fighter Suits Fighting (CE Certified) / Fire-rescue clothings

TNFA STYLE



The Deluxe concept of TNFA fire fighter suits. Provide the most modern design and the best protection. The Deluxe Modern concept of TNFA
Material: Outer shell: Kanox HM-02RP, rip stop, Dark Blue, Red, Yellow, Orange, Golden Brown
Moisture barrier: Gore-Tex Fireblocker
Structural Firefighting Coat and Trousers
THE DELUXE CONCEPT OF TNFA
EN 469 CERTIFIED

COAT

- Comfortable high protective collar with throat tab keeps moisture out and provides secure thermal seal and protection
- Radio pocket on left chest
- Storm flap with Velcro closure covering zip

TROUSERS

- Paraguard reinforcement on knees
- 50mm yellow/ silver/ yellow reflective trim on lower legs
- FR thread used throughout

WDP-NX-9088



Fire-rescue suits with hood

Material:

100% DuPont NOMEX

Application:

Fire control assistance person or fire fighter in the factories





RI- WJH0758P ABS Emergency Sh

Combination shower & eye wash

1. Material: all of eye washes, shower sprayer head and pipes are ABS.
2. Coating: the especial coating can resist the most chemicals
3. Sprayer head: the ABS diameter of spray head is 250mm, supply the MAX. outlet water flux 80L/min, (the pressure is 0.6MPa). The ABS diameter of the eye wash bowl is 250mm. Built-in bubbly equipment, softened water spray for eye protection, the outside have the duct cap, removed automatically when eye wash is operated.
4. Valve: the valve of the shower is G1 spherical valve.
The valve of the eye wash is G1/2spherical valve.
5. Rate of flow: along with the pipeline pressure the water flux is changed, within the stated water pressure , the MAX. outlet water flux is 9-12L/min.
6. Water pressure: the applicable water pressure is 0.2MPa-0.6MPa.
7. Source: normal temperature purity water or according with sanitation standard water.



RI- WJH0358A Stainless Steel

COMBINATION EMERGENCY SHOWER EYE WASH

Stainless combination shower eye wash, which well accord with lustration grade, is the same with semiconductor, laboratory, medical treatment etc., the professional locale.

1. The whole body is made of stainless steel, which well be accord with the lustration grade, firm and resistant chemical.
2. Eye wash is suitable for cleaning eyes, face and hands; the spray head can be use of washing the whole body.
3. Eye wash and spray shower can be used at the same time, also separately use.
4. Switch of the spray shower is controlled by the top of the handle; the flow is steady and ample.
5. Height of the bowl is condign, a couple water bore supply is humanistic design, the height and angle design is according to the proportion of the face.
6. Outlet water bore has been dealt with, make the water more mild, in order to protect the eyes from being harmed.
7. Valve-switch make the operation simple, only to touch the knob when eye wash is operated.
8. Drain directly, the used water flow directly through the tube which is in the bowl, so it hasn't polluter.
9. On the base of the emergency grade in the locale, can add the alarms, when to operate the on-off, it is active, to put in mind of the others.



RI- WJH0358A emergency shower

COMBINATION EMERGENCY SHOWER EYE WASH

Stainless combination shower eye wash, which well accord with lustration grade, is the same with semiconductor, laboratory, medical treatment etc., the professional locale.

1. The whole body is made of stainless steel, which well be accord with the lustration grade, firm and resistant chemical.
2. Eye wash is suitable for cleaning eyes, face and hands; the spray head can be use of washing the whole body.
3. Eye wash and spray shower can be used at the same time, also separately use.
4. Switch of the spray shower is controlled by the top of the handle; the flow is steady and ample.
5. Height of the bowl is condign, a couple water bore supply is humanistic design, the height and angle design is according to the proportion of the face.
6. Outlet water bore has been dealt with, make the water more mild, in order to protect the eyes from being harmed.
7. Valve-switch make the operation simple, only to touch the knob when eye wash is operated.
8. Drain directly, the used water flow directly through the tube which is in the bowl, so it hasn't polluter.
9. On the base of the emergency grade in the locale, can add the alarms, when to operate the on-off, it is active, to put in mind of the others.

Pressure Oxygen Breathing Apparatus /SCBA /Cylinder

SCBA (Self Contained Breathing Apparatus) Accessories



Full Face Mask



Reducing Valve
And Pressure
Display Unit



Air-Supply Valve



Aluminum Liner and Fully Wrapped
Carbon Fiber Reinforced
Aluminum Lined Composite Cylinder
(6.8 liter)



Oxygen Breathing Apparatus



Duration: 4 hours / 2 hours
Oxygen reserves: 540 liter / 320 liter
Capacity of Cylinder: 2.7 liter / 1.6 liter
(Specification available)

Back board



Case




Cylinder (CE/DOT certified)

RI-LC9.0-30	RI-LC6.8-30A	RI-LC4.7-30	RI-LWFC-110-3.0	RI-LC2.7-20	RI-LC2.5-20A

Type	Working Pressure (Mpa)	Outside Diameter (mm)	Length (mm)	Weight (kg)	Service Life (year)	Inspection Cycle
RI-LC9.0-30	30 MPa	180mm	540mm	5.4 kg	15 year	3 year
RI-LC6.8-30A	30 MPa	158mm	525mm	3.9 kg	15 year	3 year
RI-LC4.7-30	30 MPa	140mm	475mm	3.0 kg	15 year	3 year
RI-LWFC-110-3.0	30 MPa	108mm	492mm	1.9 kg	15 year	3 year
RI-LC2.7-20	20 MPa	130mm	312mm	1.6 kg	15 year	3 year
RI-LC2.5-20A	20 MPa	132mm	299mm	1.5 kg	15 year	3 year

ISO-SAFE MP

- A Twin filtration system is designed for safeguard the continuing negative airflow for the patient inside the Iso-Safe MP and the HCWs in the time to replace the filter without interruption of the air and safeguard against any mul-function of any unit of Puriclear
- With a proper air balance pressure system that can transform a space to an airborne Isolation area in munites by creating a cubic air-lock which prevent the infectious diseases leak out from the Iso-Safe MP. The HEPA filter can purify the air from inside the room (99.97%) and release clear air to outside (hospital corridor is 80% efficiency) to protect for the other HCWs (Demo DVD available)

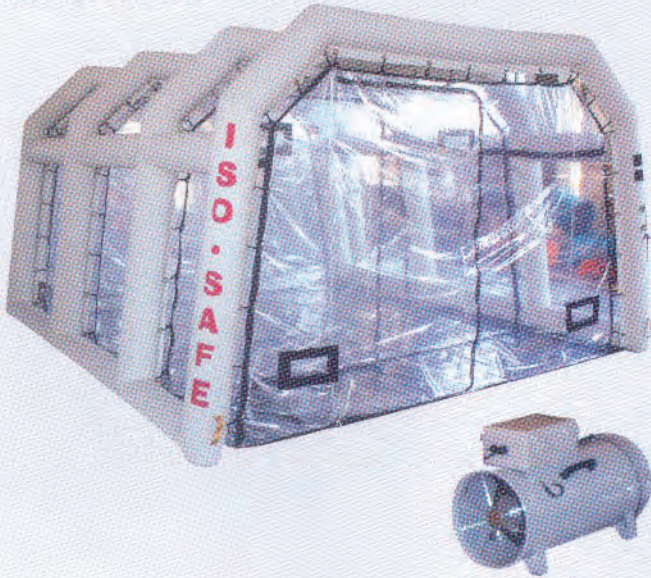

HEPA Filter

ISO-SAFE SP-Chamber

a. **Size:** 210cmx60cmx60cm (±5%)

b. **Function & Strength :**

- (1). Waterproof zipper ensures sealed completely.
- (2). The transparent material to recognize easily.
- (3). Enclosed efficient purification (HEPA), efficiency more than 95%.
- (4). Sustain the negative pressure of chamber, more than 30 pa, by air frame (double supports on the head and tail).
- (5). INPIC includes 6 gloves to operate easily.
- (6). The belt attached on the bottom of SP can fix in the sickbed or back of the bed board.
- (7). Weight : less than 6 kg.




Components of SP



Hand pump

RI-ST-02 Stretcher

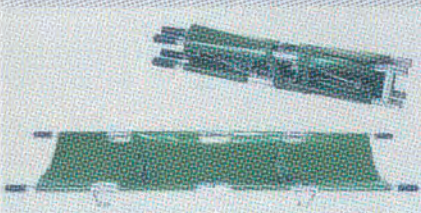

- Foldable stretcher
- Material: Stainless Steel + Canvas
- Fabric Color: Customized available

RI-L1051 Thermal Reflective Emergency Blanket



Our high-efficiency thermal blanket reflects up to 90% of body heat. It unfolds to a generous 84" x 52" from a sealed packet measuring only 4.25" x 4.25" x .5" and weighing under 2 oz.

RI-L1001/L1013/L1011 Thermal Blanket



Blanket, 100% Polyester
RI-L1001 Warm and durable, our 100% Polyester blanket is an economical choice for shelters.

Blanket, 70% Wool
RI-L1013 Our 70% wool-Polyester blend blanket is our heaviest, designed for the coldest weather. Measures a generous 60" x 90".


Blanket, 30% Wool
RI-L1011 The 30% Wool-Polyester blend blanket is heavier than 100% Polyester and is ideal for cooler climates.

RI-L4010C Cot Pillows



This pillow is specifically designed for Shelters, Push Pacs, EOC's, Mass Casualty and Stocking Trailersplus, it's an ideal complement to any of our cots. Made from lightweight, hypo-allergenic brushed finish polyester over PVC, it's inflatable, adjustable, disposable pillow - and very, very economical. Just compare to any traditional pillow design. This cot pillow folds flat or can be rolled into almost any size so it takes up very little space. Users can easily inflate and deflate to desired firmness.

Oil/liquid Absorbent



RSO-BO-PAD
Oil Sorbent PAD
Size: 41cm x 51cm
Absorbency : 110 Liter or above
Thickness: 3mm ~ 8mm
Absorbing oil and repelling water

Item#/Code	Size	thickness	Count & Packing	Absorbency	Keywords	Description
BO-PAD200	41cm x 51cm	3 mm	200pcs/B	>150L/B	single weight	medium viscosity petroleum, petroleum based fluids etc.
BO-PAD250	41cm x 51cm	4 mm	150pcs/B	>140L/B	medium weight	
BO-PAD300	41cm x 51cm	5 mm	150pcs/B	>165L/B	medium weight	
BO-PAD350	41cm x 51cm	7 mm	100pcs/B	>130L/B	heavy weight	
BO-PAD400	41cm x 51cm	8 mm	100pcs/B	>150L/B	double weight	
BO-PAD8250	41cm x 51cm	5 mm	150pcs/B	115L/B	thick fibres	high petroleum, petroleum based fluids etc.
BO-PAD8350	41cm x 51cm	8 mm	100pcs/B	110L/B	thick fibres	



RSO-BO-BOM
Oil Sorbent Boom
Size: ϕ 12.7cm x 13M above
Absorbency : 125 Liter or above
Thickness: 3mm ~ 8mm
Absorbing oil and repelling water

Item#/Code	Size	Count & Packing	Absorbency	Description
BO-BOM12730	ϕ 12.7cm x 3M	4BOMS/B	>125L/B	
BO-BOM12760	ϕ 12.7cm x 6M	2BOMS/B	>125L/B	
BO-BOM20030	ϕ 20cm x 3M	4BOMS/B	>305L/B	
BO-BOM20060	ϕ 20cm x 6M	2BOMS/B	>305L/B	



RSO-BO-PIL
Oil Sorbent Pillow
Size: 20cm x 25cm
40cm x 50cm
Absorbency : 90 Liter or above
Thickness: 3mm ~ 8mm
Absorbing oil and repelling water

Item#/Code	Size	Count & Packing	Absorbency	Description
BO-PIL2025	20cm x 25cm	32/B	>90L/B	
BO-PIL4050	40cm x 50cm	16/B	>144L/B	



RSO-BO-SOC
Oil Sorbent Sock
Size: ϕ 7.6cm x 1.2M
Absorbency : 125 Liter or above
Absorbing oil and repelling water

Item#/Code	Size	Count & Packing	Absorbency	Description
BO-SOC7612	ϕ 7.6cm x 1.2M	20socks/B	>165L/B	
BO-SOC10030	ϕ 10cm x 3M	8socks/B	>150L/B	
BO-SOC12730	ϕ 12.7cm x 3M	4socks/B	>125L/B	
BO-SOC12760	ϕ 12.7cm x 6M	2socks/B	>125L/B	
BO-SOC20030	ϕ 20cm x 3M	4socks/B	>305L/B	
BO-SOC20060	ϕ 20cm x 6M	2socks/B	>305L/B	



RSO-BO-LMTR
Oil Sorbent Roll
Size: 41cm x 50cm
Absorbency : 125 Liter or above
Thickness: 3mm ~ 8mm
Absorbing oil and repelling water

Item#/Code	Size	thickness	Count & Packing	Absorbency	Keywords	Description
BO-LMTR2001S	41cm x 50cm	3 mm	200pcs/B	>145L/B	single weight	Fine fibres, one-sided with abrasion resistance and oil can be infiltrated material, with droplet can be trapped
BO-LMTR2501S	41cm x 50cm	4 mm	150pcs/B	>135L/B	medium weight	
BO-LMTR3001S	41cm x 50cm	5 mm	150pcs/B	>160L/B	medium weight	
BO-LMTR3501S	41cm x 50cm	7 mm	100pcs/B	>125L/B	heavy weight	
BO-LMTR4001S	41cm x 50cm	8 mm	100pcs/B	>145L/B	double weight	
BO-LMTR2002S	41cm x 50cm	3 mm	200pcs/B	>145L/B	single weight	Fine fibres, two-sided with abrasion resistance and oil can be infiltrated material, with droplet can be trapped
BO-LMTR2502S	41cm x 50cm	4 mm	150pcs/B	>135L/B	medium weight	
BO-LMTR3002S	41cm x 50cm	5 mm	150pcs/B	>160L/B	medium weight	
BO-LMTR3502S	41cm x 50cm	7 mm	100pcs/B	>125L/B	heavy weight	
BO-LMTR4002S	41cm x 50cm	8 mm	100pcs/B	>145L/B	double weight	
BO-LMTR200SP	41cm x 50cm	3 mm	200pcs/B	>145L/B	single weight	Description
BO-LMTR250SP	41cm x 50cm	4 mm	150pcs/B	>135L/B	medium weight	
BO-LMTR300SP	41cm x 50cm	5 mm	150pcs/B	>160L/B	medium weight	
BO-LMTR350SP	41cm x 50cm	7 mm	100pcs/B	>125L/B	heavy weight	
BO-LMTR400SP	41cm x 50cm	8 mm	100pcs/B	>145L/B	double weight	



RSO-HO-PAD
HAZMAT Sorbent PAD
Size: 41cm x 51cm
Absorbency : 130 Liter or above
Thickness: 3mm ~ 8mm
Provides a quick "No-Decision Response" when the nature of the spill is unknown.
Absorbs virtually all liquids both aggressive and non-aggressive.

Item#/Code	Size	thickness	Count & Packing	Absorbency	Keywords	Description
HO-PAD200	41cm x 51cm	3 mm	200pcs/B	>150L/B	single weight	
HO-PAD250	41cm x 51cm	4 mm	150pcs/B	>140L/B	medium weight	
HO-PAD300	41cm x 51cm	5 mm	150pcs/B	>165L/B	medium weight	
HO-PAD350	41cm x 51cm	7 mm	100pcs/B	>130L/B	heavy weight	
HO-PAD400	41cm x 51cm	8 mm	100pcs/B	>150L/B	double weight	



RSO-HO-PIL
HAZMAT Sorbent Pillow
Size: 20cm x 25cm / 40cm x 50cm
Absorbency : 16 Liter or above
Thickness: 3mm ~ 8mm
Provides a quick "No-Decision Response" when the nature of the spill is unknown.
Absorbs virtually all liquids both aggressive and non-aggressive.

Item#/Code	Size	Count & Packing	Absorbency	Description
HO-PIL2025	20cm x 25cm	32/B	>90L/B	
HO-PIL4050	40cm x 50cm	16/B	>144L/B	



RSO-HO-LMTR
 Hazmat Sorbent Roll
 Size: 41cm x 51cm
 Absorbency : 140 Liter or above
 Thickness: 3mm ~ 8mm

Provides a quick "No-Decision Response" when the nature of the spill is unknown.
 Absorbs virtually all liquids both aggressive and non-aggressive.

Item#/Code	Size	thickness	Count & Packing	Absorbency	Keywords	Description
HIO-LMTR2001S	41cm x 50cm	3 mm	200pcs/B	>145L/B	single weight	Fine fibres, one-sided with double-sided, low-linting coverstock abrasion resistance and Spill can be infiltrated material, with dimpled can be tramped
HIO-LMTR2501S	41cm x 50cm	4 mm	150pcs/B	>135L/B	medium weight	
HIO-LMTR3001S	41cm x 50cm	5 mm	150pcs/B	>156L/B	medium weight	
HIO-LMTR3501S	41cm x 50cm	7 mm	100pcs/B	>125L/B	heavy weight	
HIO-LMTR4001S	41cm x 50cm	8 mm	100pcs/B	>145L/B	double weight	
HIO-LMTR2002S	41cm x 50cm	3 mm	200pcs/B	>145L/B	single weight	
HIO-LMTR2502S	41cm x 50cm	4 mm	150pcs/B	>135L/B	medium weight	
HIO-LMTR3002S	41cm x 50cm	5 mm	150pcs/B	>156L/B	medium weight	
HIO-LMTR3502S	41cm x 50cm	7 mm	100pcs/B	>125L/B	heavy weight	
HIO-LMTR4002S	41cm x 50cm	8 mm	100pcs/B	>145L/B	double weight	
HIO-LMTR2005P	41cm x 50cm	3 mm	200pcs/B	>145L/B	single weight	Fine fibres, two-sided with double-sided, low-linting coverstock abrasion resistance and Spill can be infiltrated material, with dimpled can be tramped
HIO-LMTR2505P	41cm x 50cm	4 mm	150pcs/B	>135L/B	medium weight	
HIO-LMTR3005P	41cm x 50cm	5 mm	150pcs/B	>156L/B	medium weight	
HIO-LMTR3505P	41cm x 50cm	7 mm	100pcs/B	>125L/B	heavy weight	
HIO-LMTR4005P	41cm x 50cm	8 mm	100pcs/B	>145L/B	double weight	



RSO-HO-SOC
 Hazmat Sorbent SOCK
 Size: ϕ 7.6cm x 1.2M above
 Absorbency : 125 Liter or above

Provides a quick "No-Decision Response" when the nature of the spill is unknown.
 Absorbs virtually all liquids both aggressive and non-aggressive.


Item#/Code	Size	Count & Packing	Absorbency	Description
HIO-SOC7612	ϕ 7.6cm x 1.2M	20socks/B	>165L/B	
HIO-SOC10030	ϕ 10cm x 3M	8socks/B	>150L/B	
HIO-SOC12730	ϕ 12.7cm x 3M	4socks/B	>125L/B	
HIO-SOC12760	ϕ 12.7cm x 6M	2socks/B	>125L/B	
HIO-SOC20030	ϕ 20cm x 3M	4socks/B	>305L/B	
HIO-SOC20060	ϕ 20cm x 6M	2socks/B	>305L/B	



RSO-HO-BOM
 Hazmat Sorbent BOOM
 Size: ϕ 12.7cm x 13M above
 Absorbency : 125 Liter or above
 Thickness: 3mm ~ 8mm

Provides a quick "No-Decision Response" when the nature of the spill is unknown.
 Absorbs virtually all liquids both aggressive and non-aggressive.

Item#/Code	Size	Count & Packing	Absorbency	Description
HIO-BOM12730	ϕ 12.7cm x 3M	4BOMS/B	>125L/B	
HIO-BOM12760	ϕ 12.7cm x 6M	2BOMS/B	>125L/B	
HIO-BOM20030	ϕ 20cm x 3M	4BOMS/B	>305L/B	
HIO-BOM20060	ϕ 20cm x 6M	2BOMS/B	>305L/B	

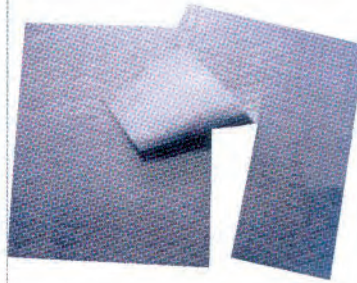

RSO-MO-PAD
 Universal Sorbent PAD
 Size: 41cm x 50cm
 Absorbency : 130 Liter or above
 Thickness: 3mm ~ 8mm

For general and preventative maintenance
 Use to absorb non-aggressive spills such as oils, coolants, solvents, and water.

Item#/Code	Size	thickness	Count & Packing	Absorbency	Keywords	Description
MO-PAD200	41cm x 50cm	3 mm	200pcs/B	>150L/B	single weight	
MO-PAD250	41cm x 50cm	4 mm	150pcs/B	>140L/B	medium weight	
MO-PAD300	41cm x 50cm	5 mm	150pcs/B	>165L/B	medium weight	
MO-PAD350	41cm x 50cm	7 mm	100pcs/B	>130L/B	heavy weight	
MO-PAD400	41cm x 50cm	8 mm	100pcs/B	>150L/B	double weight	



RSO-HO-SOC
 Universal Sorbent SOCK
 Size: ϕ 7.6cm x 1.2M above
 Absorbency : 165 Liter or above

Item#/Code	Size	Count & Packing	Absorbency	Description
MO-SOC7612	ϕ 7.6cm x 1.2M	20L/B	>165L/B	
MO-SOC10030	ϕ 10cm x 3M	16L/B	>305L/B	
MO-SOC12730	ϕ 12.7cm x 3M	8L/B	>250L/B	
MO-SOC12760	ϕ 12.7cm x 6M	4L/B	>250L/B	
MO-SOC20030	ϕ 20cm x 3M	4L/B	>305L/B	
MO-SOC20060	ϕ 20cm x 6M	2L/B	>305L/B	



RSO-MO-LMTR
 Universal Sorbent Roll
 Size: 41cm x 50M / 82cm x 50M
 Absorbency : 125 Liter or above
 Thickness: 3mm ~ 8mm

For general and preventative maintenance
 Use to absorb non-aggressive spills such as oils, coolants, solvents, and water

Item#/Code	Size	thickness	Count & Packing	Absorbency	Keywords	Description
MO-MTR200	41cm x 50M	3 mm	2R/B	>146L/B	single weight	Universal spills
MO-MTR200D	82cm x 50M	3 mm	1R/B	>146L/B		
MO-MTR250	41cm x 50M	4 mm	2R/B	>184L/B	medium weight	
MO-MTR250D	82cm x 50M	4 mm	1R/B	>184L/B		
MO-MTR300	41cm x 50M	5 mm	2R/B	>220L/B	medium weight	
MO-MTR300D	82cm x 50M	5 mm	1R/B	>220L/B		
MO-MTR350	41cm x 50M	7 mm	2R/B	>260L/B	heavy weight	
MO-MTR350D	82cm x 50M	7 mm	1R/B	>260L/B		
MO-MTR400	41cm x 50M	8 mm	2R/B	>290L/B	double weight	
MO-MTR400D	82cm x 50M	8 mm	1R/B	>290L/B		

Fire Escape / Retardant / Personal Safety

HS-KT-102 Pocket Smoke Protective Mask



- This mask uses DuPont kapton material (UL listed)
- It's thermal protection can be up to 450°C
- Designed for flame resistance and easy store in pocket
- The five layers filter inside with active fiber protects against toxic gases (including CO, CO₂, SO₂, HCL, HS, HCN, Formaldehyde, Benzol, Acrylic Acid, Ammonia), fatal smoke and provide fresh air for survivals during escape

HS-PE-005 PVC Smoke Isolation Hood



- Descriptions :**
- Material: PP
 - Size: 550mm(w)x880mm(l)x0.05mm(h)
 - Thermal protection can be up to 120°C
 - Can escape safely from them tenth floor high building through heavy smoke area

HS-NM-096 Fire Escape Poncho



- Description :**
- Dupont's Nomex SL E-89 blended with Kevlar material
 - Temperature hold up to 550°C flashfire up to 1000°C
 - Passed the flame tests of A1 & A4 of ROC's Bureau of Inspection & Quarantine, in accordance with China National Standard (CNS) 10285 regulations
 - The poncho design of easy donning/doffing helps victims move and catch the escaping chance in the first critical 10 seconds
 - Designed also for rain & thermal protection

HS-OF-345 Fire Retarded Napkin



- Descriptions :**
- The products is made of flame resistance oxygenated carbon fiber and its edge is bounded with DuPont's Nomex IIIA
 - The product has passed CNS 10285 method A-1 & A-4 flame tests
 - Temperature hold up to 550°C & flashfire up to 1000°C
 - The product is designed for retarding the beginning fire or as a escape blanket
- Application :** Households (kitchens, living rooms), Labs, Companies, Public sited (ktv, pub, restaurants), Hospitals,

HS-HP-802 CO Protective Mask (Heavy Duty)



- Hardened goggles & face-mask are joint together for easy wearing and fire/chemical protection
- With 2 pieces of cartridges for better inhalation and lasting and a carrying bag
- With complex contents, filtering, absorbing, oxidizing functions work together against the toxic gas: CO, NH₃, H₂S, SO₂, HCN, HBR, C₂H₄...
- Tested and approved by ITRI of ROC
- Provides 20-40 minutes of breathing capacity

HS-TA-590 Personal Purse Alarm



- Use the key ring to fix the alarm in handbag or purse and clip the rip cord on belt loop, 110db alarm is activated by pulling the ripcord, which removes a plastic plug from it socket, until the plug is replaced in its socket
- Siren output:** 110db
Operated with two batteries
Color: black, white, yellow, orange
Size: 60x50x35mm

HS-TG-508 Personal Spray



- Contents: 3% capsicum, 3% mustard, 94% HPC R-134A, non-toxic, non-pollution, inflammable air with pressure
- In emergency, push the red spurting head against intruders' face, the intruders sill suffer with serious physical stimulus
- The red button safety design avoids mistouching
- Weight: 25G
- Key chain enclosed for easy carrying

HS-SL-030 Neon Light Stick



- 4 Hours of hi-intensity safety lights, another 4 hours of low visibility (total 8 hours or above)
- Inflammable, noncorrosive, emits 360° of light, requires no batteries, extra long shelf life

First Aids Kits

RI-F007A



- Material of outer pack: Neoprene
- First aid instruction booklet
 - Non-adherent pad 6x4cm
 - Non-adherent band aid 72x19mm
 - Adhesive tape 1/2"x10yds
 - Safety pin 5.0cm
 - Triangular bandage
 - Alcohol prep pad
 - Providone-Iodine prep pad
 - Scissors (S)
 - Plastic tweezers (L)

RI-U706



- Material of outer pack: Nylon
- First aid instruction booklet
 - Non-adherent pad 8x10cm
 - Non-adherent band aid 72x19mm
 - Non-adherent wound pad 10x10cm
 - Adhesive cloth tape 1"x5yds
 - Adhesive gauze bandage 7.5cm x 4m
 - Emergency thermal blanket 130x210cm
 - Triangular bandage
 - Latex gloves
 - Alcohol prep pad
 - Providone-Iodine prep pad
 - Scissors (S)
 - Plastic tweezers (L)

RI-HLL-04



- Material of outer pack: PP
- First aid instruction booklet
 - Non-adherent pad 10x8cm
 - Non-adherent band aid 72x19mm
 - Non-adherent wound pad 10x10cm
 - Net bandage (head & digit)
 - Adhesive tape 1/2"x10yds
 - Safety pin 5.0cm
 - Elastic bandage 5.0cm x 4m
 - Emergency thermal blanket 130x210cm
 - Triangular bandage
 - Latex gloves
 - Alcohol prep pad
 - Providone-Iodine prep pad
 - Scissors (S)
 - Plastic tweezers (L)

RI-NB 728 Stand-alone photoelectric smoke detector



Product Features:

- Photoelectric sensing technology.
- Easy installation and maintenance.
- Battery case at the back of a sensor for easy removal of a battery.
- Low-battery warning.
- Test button verifies battery and alarm operation.
- Sounding a loud alarm signal of exceeding 85 dB in alarm mode.
- Five-year limited warranty.

The RI-NB-920 Stand- alone Gas detector



Product Features:

- FIGARO semiconductor sensor heads used for accurate flammable gas detection.
- Using microprocessor for circuit control and gas monitoring to assure performance stability and reliability.
- NB-920-L detects methane gas, NB-920-L detects propane gas in a continuous manner.
- SMT circuit board design with FR4 double sides PCB -satisfactory quality and reliability guaranteed.
- Test button verifies alarm operation any time.
- Sounding a loud alarm signal of exceeding 85 dB .at 10 feet.
- Easy installation and maintenance.
- Complying the UL-1484 standard and EN50194.
- No battery is required for circuit control.
- Ergonomic design of detector casing.


The NB-930 Stand- alone CO detector



Product Features:

- England electrochemical CO sensor with industrial grade.
- Standard quality to provide accuracy and stability; Using microprocessor for circuit control and gas monitoring to assure performance stability and reliability.
- Low battery warning.
- Durable sensor head, no need for be pre-programmed in the factory to 3 years duration to alert customers to replace with a new unit.
- Sounding a loud alarm signal of exceeding 85dB at 10 feet at alarm mode.
- Five years limited warranty for the CO-sensin.

The RI-NB 730 Stand-alone heat detector

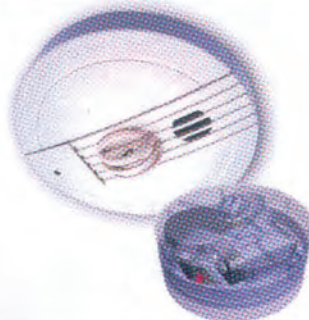

Product Features:

- Electronic thermistor sensing technology.
- Easy installation and maintenance.
- Battery case at the back of a sensor for easy removal of a battery.
- Low-battery warning.
- Test button verifies battery and alarm operation.
- Sounding a loud alarm signal of exceeding 85 dB in alarm mode.
- Five-year limited warranty.

Water Detector



Protect your home from potential water flood damage by placing anywhere a potential water leak exists -- near or beneath sump pumps, plumbing, refrigerators, dishwashers, washing machines, sinks, water heaters, toilets, basements and garages.

Portable Ventilator

Features:

- Large capacity motor with E-class of TECO/TATUG brand motor,
- long endurance. Specially designed axial propeller, high static pressure,
- high flow rate, excellent strength. Usages: Ventilation for mine, under ground, drainage workshop, gas exhaust, dust blowing, fresh air. Flexible duct with standard length 5M. Duct can be order from 1M ~ 20M.



JM-450 2P / 4P Jumbo Fan

Specifications:

- Usages: Vessel workshops; get rid of smoking and heat during electric soldering. Steel mill and casting factory; cooling purpose on extension pressure. The big workshop, tunnel and basement ventilation.
- Vessel workshops, get rid of smoking and heat during electric soldering, dry paint, fresh air and clear smell less.
- Steel mill and casting factory; cooling purpose on extension pressure and casting.
- Anti-heat an ventilation for work fields in high temperatures.
- Tunnel and basement ventilation.
- Stadiums, parties ventilation.
- Ventilate while loading container.
- Ventilation for the big hotroom and flower house.
- Studio; Typhoon effects.
- Dry plant, fish and meat.



JM-616, 624 Jumbo Fan

Specifications:

- Usages: Vessel workshops; get rid of smoking and heat during electric soldering. Steel mill and casting factory; cooling purpose on extension pressure. The big workshop, tunnel and basement ventilation.

Features:


- High airflow,
- Light weight,
- Easy move around.



Flexible Duct

Connection Flexible Duct

Easily fitted extensions can extend the duct.
Simply slip the extension over the ring on the end of the duct and securely tie the cord.

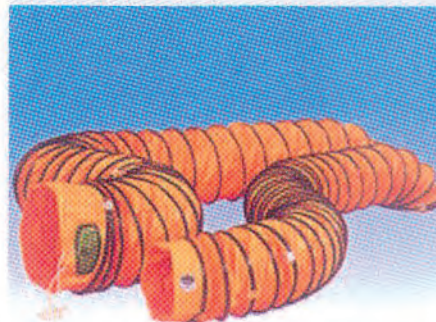

Specifications:

- Dia: From 180m/m ~ 1000m/m
- Length Measure: From 1M ~ 20M

Turnkey Solutions (Whole Plant Export)

Fully Automatic Rotary System Double-Color Plastic Rain Boots Injection Moulding Machine




Performance:

Suitable for making single or double color PVC boots for men, women or children.

Features:

- Hydraulic system.
- Screw stroke and screw driving is controlled by hydraulic motor.
- Injection system is controlled by two steps pressure.
- Movable injection units controlled by hydraulic system.
- Easy for screw cleaning.
- Powerful mould clamping equipment.
- Rotary table is driven by hydraulic motor in two speed controlling.

Accessories

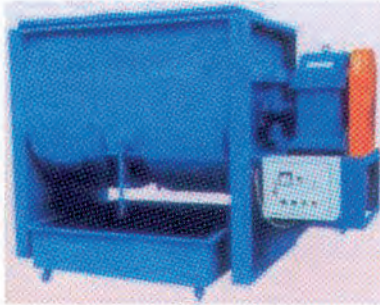

Dye/dry mixer
(mezclador de teñir y secar) to mix materials & to remove the water from it.



Plastic crusher
(prensador) to crush leftover materials from injection moulding while machine starts and stops.



Cooling tower
(Torre refrigerante de agua) to cool down the heat that is generated from the machine during processing.



Shoes mould(moldes de zapatos) it's made in accordance with style, patterns & sizes requested by customers.


Stone Machinery

Stone cutting Machine Style No:RT-QJ-22LS



Item	Unit	RT-QJ22LS
Max Length	mm	2000
Max Width	mm	1000
Dia of cutter	mm	Ø400
Power	kw	11
Material	/	Steel
Dimension	mm	4000x1960x2100
Water	m3/h	2
Weight	kg	2800

Polishing Machine Style No:RT-NS-5

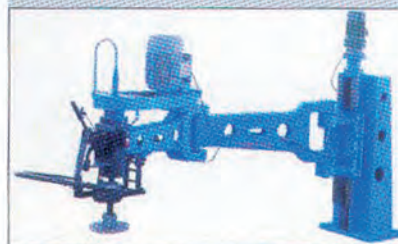

Item	Unit	RT-S-5
Dia of Rotroy	mm	650x3000
Dia od plate	mm	260
Up/ Down range	mm	0-520
Style	/	Manual
Power	kw	5.5
Dimension	mm	3000x750x1200
Weight	kg	730